
Miami, FL (Main) Tel: (305) 885-4992 Fax: (305) 885-9537 sales@usairmotivegse.com

Los Angeles, CA Tel: (310) 327-8407 Fax: (310) 327-8439 paula@usairmotivegse.com www.usairmotivegse.com

JET STARTER HOSE

Aircraft Jet Starter Duct & Cover Assemblies

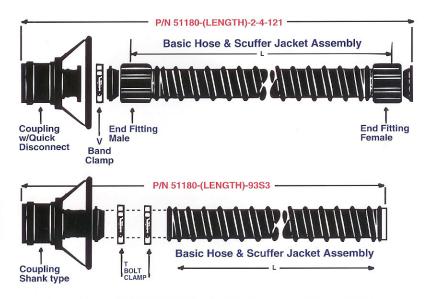

U.S. Airmotive has ready for immediate delivery lengths of 20, 30, 40, 50, or 60 ft. (Custom lengths available upon request).

LAVATORY DISCHARGE HOSE

Flexible durable discharge hose for use with lavatory trucks supporting aircraft. Made of 2 ply polyester vinyl laminated: Helically coiled wire reinforcement.

Smooth interior for quick, non-restricted flow. Wear- and leak- resistant. A maximum 4" bend radius can be accomplished without reducing inside diameter. Easy to clean.


Color: Blue / Black Duct Diameter: 4" I.D.

Length: 12ft. - 15ft. - 20ft.

Temperature Range: -40 degrees F to + 250 degrees F

NOTE: Soft end cuffs

Other diameters are available on special request.

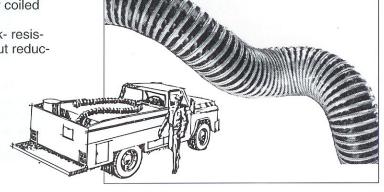

CAPS, COUPLINGS, NIPPLES AND PLUGS PROVIDED FOR POTABLE WATER AND LAVATORY SERVICE REQUIREMENTS

Service couplings for potable water (3/4") and lavatory (1") aircraft fill servicing.
Service plugs for potable water and lavatory couplings used to prevent internal contamination.

 Service nipples for potable water and lavatory truck/cart installation. Utilized for liquid fill servicing or to store and secure couplings onto service vehicles.

> Service caps for potable water and lavatory fill and drain port sealing. Caps assist in the prevention of white and blue ice while virtually eliminating spillage of lavatory fluid and potable water onto the ramp.

